


Specification

Specification dated 2025-08-18

Equipment		XG0807ACW / ACW-LI
	Working height	7,8 m
	Platform height - folded out	5,8 m
C	Platform height - railings unfolded/folded	2,16 m/1,83 m
D/E	Platform length/width	1,67 m/0,74 m
	Platform Extended	0,90 m
A/D	Lenght with/ without ladder	1,9 m/1,68 m
E	Width machine	0,81 m
F	Wheel base	1,36 m
	Stowed ground clearance	7,1 cm
	Ground clearance in extended position (skids folded out)	2 cm
Efficiency		
	Permitted number of people on the platform inside/out-side	2/1
	Maximum platform capacity	230 kg
	Maximum load capacity of the folded-out platform	115 kg
	Drive speed, stowed	4,5 km/h
	Drive speed in extended position	0,8 km/h
	Gradeability	25%
	Turning radius - inside / outside	0/1,75 m
	Maximum slope (horizontal / vertical)	1,5° / 3°
	Control	proportional
	Wheels	32,3 cm x 10 cm
Power		
	Power source	AGM battery 4x6V/280Ah/ litowo-jonowe 26.76V/150Ah
Weight		
	Total weight	1580 kg

Machine dimensions

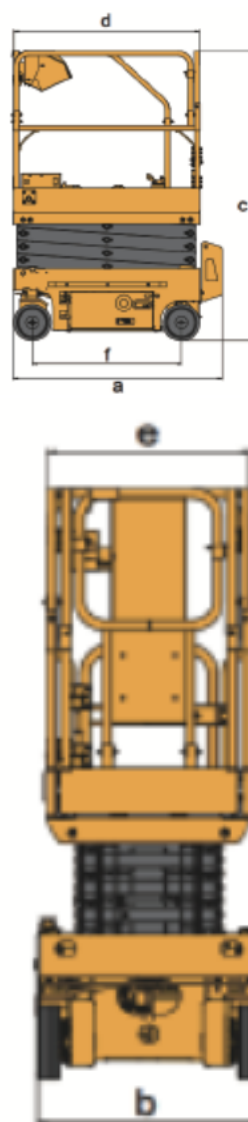

Q LINE Specification

Specification dated 2025-08-18

Standard equipment

- Proportional steering
- Foldable railings
- Self-closing entrance gate
- Emergency lowering system
- Possibility of driving at full height
- Charging protection system
- Extendable platform
- Automatic braking system
- On-board diagnostics
- Anti-rollover protection system
- Emergency stop button
- Handles for transport with a forklift
- Hour meter

Power

- Acid battery 4x6V/280Ah/ lithium-ion 26.76V/150 Ah

Drive

- Electric two front wheels

Wheels

- full, cast, gray, non-marking

Optional accessories

- Pneumatic line to platform
- Light on platform
- AC line to platform
- AGM battery

